

45W AC LED Flood Light


Parameters

Product Model	NES-FL-45
Power	45W
Input Range	90–275 V AC
LED Luminous Efficacy	≥145 lm/W
Light Source	OSRAM/BRIDGELUX LED
Colour Temperature	2700-6500 K
Total Power Consumption	45W±10%
Driver Efficiency	>85%
LED Beam Angel	120°
Net Weight*	1.7kg±0.1kg
Light Dimensions*	285 X 240 X 59 mm
Light Package Dimensions*	(300 X 225 X75) mm
Features	Auto Shutdown & Auto Restart Open & Short Circuit Protection Over Voltage Protection

Actual Luminaire



Physical Layout

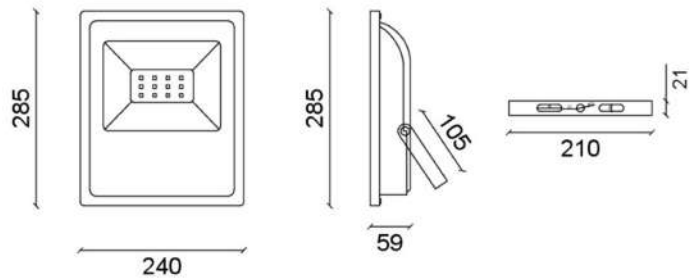

>0.95	>70	IP65	>50000 Hrs	<10%	50±3% Hz
Power Factor	CRI	IP Level	Working life	THD	Power Frequency

Others

Surge Protection	Maximum Temperature of Heat Sink	Primary Thermal Management
Up to 4.5 KV(Internal)	65 °C	Single Piece MCPCB with Thermal Pads
Recommended Height	Storage Temperature	Secondary Thermal Management
7-9 Meter	35 °C	High Pressure Aluminum Die Cast

*Subject to change without notification

Applications: Lighting of small to medium sized billboards, Parking areas around building /residential complexes, General area lighting, Lighting of monuments.